


... Maßstab für innovative Befestigungstechniken

**Zylinderstifte, mit Innengewinde DIN 7979 -D / ISO 8735 -A**  
 und Luftentweichungsfläche, gehärtet (60HRC) und geschliffen

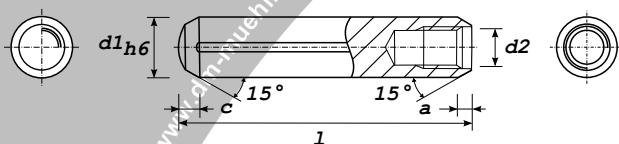

**Material:** Vergütungsstahl  
**Toleranz :** h6

d1 [mm]	4	5	6	8	10	12	16	20
d <sub>h6</sub> max. [mm]	4,000	5,000	6,000	8,000	10,000	12,000	16,000	20,000
d <sub>h6</sub> min. [mm]	3,992	4,992	5,992	7,991	9,991	11,989	15,989	19,987
d2 [mm]	M 3 (*M2,5)	M 3	M 4	M 5	M 6	M 6	M 8	M 10
c~ [mm]	1,3	1,7	2,1	2,6	3	3,8	4	4,7
a~ [mm]	0,6	0,6	0,8	1	1,2	1,6	2	2,5
l [mm]								
10	100	100						
12		100						
16	100	100	100	100				
18			100					
20	100	100	100	100	100			
24		100	100	100	100	100		
28		100	100	100	100	100		
30	100	100	100	100	100	100		
32		100	100	100	100	100		
36		100	100	100	100	100		
40	100	100	100	100	100	100	50	50
45	100*			100	100	100		50
50	100*	100	100	100	100	100	50	50
60	100*				100	100	50	25
70					100	100	25	25
80					100	100	25	25
90						100	25	25
100				100	100	100	25	25
120					100	100	25	25



Stück je Verpackungseinheit



- weitere Abmessungen auf Anfrage!

**Bsp. Bestell-Nr.:**                                                         
 DIN 7979 -D    d    l  
                     4    h6    x 10