




... Maßstab für innovative Befestigungstechniken



Zylinderstifte, Edelstahl ISO 8734

rostfrei und gehärtet (53 – 57 HRC)

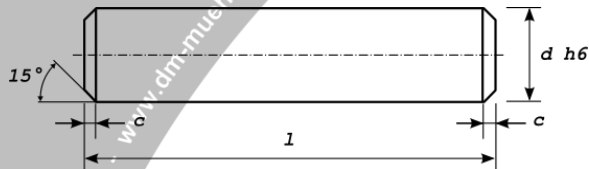

Material: 1.4034 (geh.)
Toleranz : h6

d [mm]	3	4	5	6	8	10	12
c [mm]	ca. 0,5	ca. 0,63	ca. 0,98	ca. 1,2	ca. 1,6	ca. 2	ca. 2,5
l [mm]							
4							
5	250						
6	250	200					
8	250	200	200				
10	250	200	200	100			
12	250	200	200	100			
14	250	200	200	100			
16	250	200	200	100	100		
18	250	200	200	100	100		10
20	250	200	200	100	100	25	
22	250	200	100	100			
24	250	200	100	100	100	25	
26	250	100	100	100	50		
28	250	100	100	100	50	25	
30	250	100	100	100	50	25	
32	250	100	100	100	50	25	
36	250	100	100	100	50	25	
40	250	100	100	100	50	10	10
45		100	100	100	50		
50		100	100	50	50	10	10
55				50			
60				50	50	10	10
70							10
80					50	10	10
90							



Stück je Verpackungseinheit



weitere Abmessungen, andere Toleranzen auf Anfrage!

Bsp. Bestell-Nr.:

8734A2H6

d

l

03

010

