


... Maßstab für innovative Befestigungstechniken

Schulterpassschrauben ISO 7379

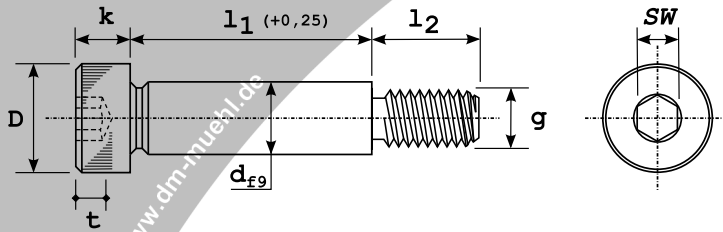

Festigkeitsklasse: 12.9

Toleranz : f9

d_{F9} [mm]	3 neu	4	5	6	8	10	12	16	20	24
g [mm]	M 2	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
$d_{F9 \max}$ [mm]	2,994	3,990	4,990	5,990	7,987	9,987	11,984	15,984	19,980	23,980
$d_{F9 \min}$ [mm]	2,969	3,960	4,960	5,960	7,951	9,951	11,941	15,941	19,928	23,928
l_2 [mm]	5	7,0	8,0	9,5	11,0	13,0	16,0	18,0	22,0	27,0
D [mm]	5,5	7,0	9,0	10,0	13,0	16,0	18,0	24,0	30,0	36,0
k [mm]	2,5	3,0	4,0	4,5	5,5	7,0	9,0	11,0	14,0	16,0
$t \min.$ [mm]	1,6	1,6	2,2	2,4	3,3	4,2	4,9	6,6	8,8	10,0
SW [mm]	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0	12,0
MA [Nm]	-	-	-	6,5	12	30	60	105	250	480
l_1 [mm]										
3	25									
4	25	25								
5	25	25	25							
6	25	25	25	25						
8	25	25	25	25	25					
10	25	25	25	25	25	25				
12	25	25	25	25	25	25	25			
16	25	25	25	25	25	25	25	10		
20		25	25	25	25	25	25	10		
25		25	25	25	25	25	25	10		
30		25	25	25	25	25	25	10	10	
35				25	25	25	25	10	*	
40				25	25	25	25	10	10	
45				*	*	25	25	10	10	10
50				25	25	25	25	10	10	10
55				*	25	25	25	10	10	*
60				25	25	25	25	10	10	10
65				*	25	25	25	*	10	*
70				*	25	25	25	10	10	10
80				*	25	25	25	10	10	10
90				*	25	25	25	10	10	10
100				*	25	25	25	10	10	10
120					25	25	25	10	10	10
130						*	*	10	*	*
140						25	*	10	*	*
150						25	*	10	*	*
160							*	10	10	*

Stück je Verpackungseinheit

MA = empfohlenes Anziehdrehmoment

Schulterpassschrauben sind auch in Edelstahl A2 verfügbar!
Sprechen Sie uns ebenfalls auf Sonderanfertigungen an.



Bsp. Bestell-Nr.: ISO 7379-12.9 -f9- 4 - M 3 x 10